

# The new *COMFORT* Fall Arrester sets higher safety standards:

Climbing with *and* without leaning back and all this with potential fall arrest forces below 4 kN!



The new *COMFORT* Fall Arrester has been designed for a smoother performance and a longer service life.

# The new **COMFORT** Fall Arrester for Height Access Systems.

## Climbing with *and* without leaning back and all this with potential fall arrest forces below 4 kN!

Söll Logo manufactured to EN353 Part 1 by Söll, the leading manufacturer of safety equipment. The **COMFORT** Fall Arrester should only be used with Söll GlideLoc Height Access Systems.

Self-closing sidewinder carabiner hook with a double-locking mechanism for complete safety. To open, move and turn the lock and release.

The carabiner hook is integrated into the new steel catch clamp in order to prevent accidental disconnection. The integrated shock absorber limits the fall arrest forces to 3.7kN. This is significantly lower than the requirement of 6kN as per EN353-1.

The shock-absorbing element also serves as a fall indicator.

The **COMFORT** patented geometry is perfectly adapted for confined access and caged ladder systems. The arrester will operate with and without leaning back.

The Söll **COMFORT** Fall Arrester is synonymous with comfort and excellent handling characteristics. The contact components are coated with a soft plastic for a smooth and quiet performance. The versatile **COMFORT** Fall Arrester shuttle will operate in vertical and horizontal applications with all Söll Height Access Systems.

To increase service life, the four outside glide rollers are protected from damage with a flexible rubber ring.

4 plastic gliders offer easy operation along the rail especially in horizontal use

The safety bolt ensures that the shuttle is always inserted correctly into the rail.


Permanently engraved serial number, CE marking and re-certification date

The date plaque indicates when the next inspection is due

The stainless steel catch clamp locks onto the rail in the event of a fall.

Each **COMFORT** Fall Arrester is designed with 10 glide rollers – 6 inside the rail and 4 outside. This greater rail contact ensures that the shuttle glides easily and smoothly along the rail.

The guide rollers, designed with a special polymer, are engineered to be wider for a smoother and quieter performance and a longer service life.

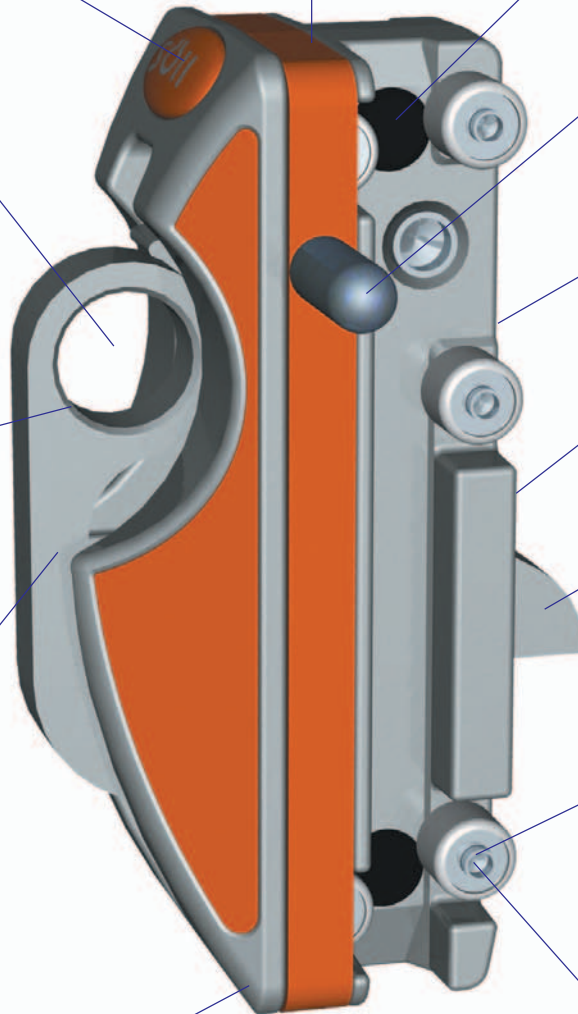

Part-No 22697

Christian Dalloz Holding Deutschland GmbH & Co. KG • Seligenweg 10 • D-95028 Hof  
Phone: +49/92 81/83 02-0 • Fax: +49/92 81/36 26 • ww2.soell-gmbh.com